


## prime<sup>™</sup> tac

200 Series

# 220 | 4.3 Mil Industrial Grade Fiberglass Reinforced Filament Tape

Our Primetac<sup>™</sup> brand 220 tape is a premium high strength filament tape built for medium duty unitizing, bundling, strapping and reinforcing.

INDUSTRIAL GRADE

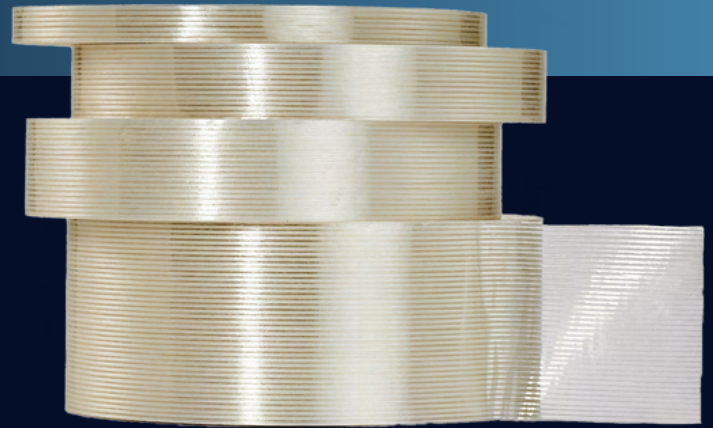

Built for Bundling



Ideal for Palletizing



Quick Tack



Superior Package  
Reinforcement



Built for Textured  
Surfaces

## BUILT FOR



### Specifications

**Adhesive**  
Hotmelt

**Backing**  
BOPP

**Total Thickness**  
4.3 mil | 109 microns  
*ASTM D-3652*

**Tensile Strength**  
112 lbs / inch (20 kg / cm)  
*ASTM D-3759*

**Operating Temperature**  
23°F - 158°F (-5°C - 70°C)

### Features

- ✓ Clear construction allows graphics and printing to be seen through the tape
- ✓ Highly resistant to abrasion, moisture, solvent, cracking and splitting
- ✓ Impact and shock resistant
- ✓ High holding power for a wide variety of use cases
- ✓ RoHS compliant

### Other Physical Properties

Property	Peel Adhesion 90° <i>ASTM D-3330</i>	Holding Power <i>ASTM D-3654</i>	Elongation % at Break <i>ASTM D-3759</i>
Standard	79 oz / in	≥ 36 h	3-5%
Metric	0.88 kg / cm	≥ 36 h	3-5%

Test Condition: Temperature: 23°C ± 2°C (73.4°F ± 3.6°F) | Relative Humidity: 50% ± 5%

### Applications

- Bundling/Palletizing
- Carton Sealing
- Packaging

### Storage and Usage

#### Suggested Storage Conditions:

- 15°C - 30°C (59°F-86°F), or as close as possible to room temperature.
- 60% Max Relative Humidity
- Original packaging in a cool, dry area away from direct sunlight exposure and from freezing.

#### Suggested Application Conditions


- Surfaces to which tape is applied should be clean, dry and free of dust, grease, oil or other contaminants.

Available  
Product Options

### Stock Lengths




### Stock Widths

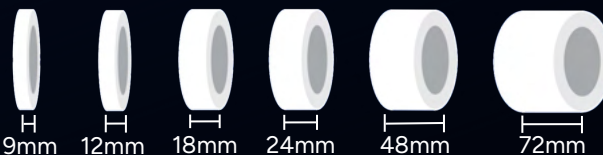


**We customize! Contact a representative for special sizes.**

### Types



### Colors



While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The physical and performance characteristics shown are averages obtained from tests recommended by PSTC procedures in our laboratory and the user must by test or otherwise determine suitability for his purpose. There is no warranty of fitness for a particular purpose. Primetac does not take responsibility for the defective material if not stored and used in accordance with the conditions listed above. This specification sheet might change due to the continuous improvement for better quality product.