


premier<sup>®</sup>

600 Series

## 601 | 1.5 Mil Utility Grade BOPP Hot Melt Carton Sealing Tape

Our Premier<sup>™</sup> brand 601 excels on 100% recycled corrugated and is built for general purpose packaging and light weight box applications. The 601 is engineered for the perfect balance of shear (holding power) and peel adhesion.

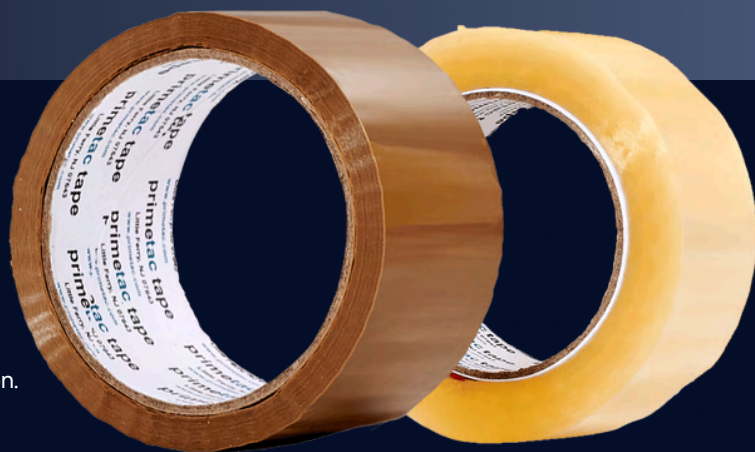

UTILITY GRADE



Built for Boxes



All-Weather



Easy & Even Unwind



Quick Tack



Meets FDA Guidelines for Indirect Food Contact

**BUILT FOR**



Moving & Storage



Food & Beverage



Retail



Pharma/Medical



Fulfillment



Industrial



Carton Sealing

### Specifications

**Adhesive**  
Hotmelt

**Total Thickness**  
1.5 mil | 38 microns  
PSTC-133

**Adhesion to Steel**  
39 oz / inch (0.44 kg / cm)  
PSTC-101

**Tensile Strength**  
18 lbs / inch (3.2 kg / cm)  
PSTC-131

**Operating Temperature**  
14°F - 140°F (-10°C - 60°C)

### Features

- ✓ Designed for any % recycled corrugated
- ✓ Resists moisture, scuffs, tears, and chemicals
- ✓ Easy to unwind for manual or automatic application
- ✓ Perfect balance of holding power and peel adhesion.
- ✓ Easy, even release for convenient and consistent seals
- ✓ RoHS & REACH compliant

### Other Physical Properties

Property	Film Thickness	Elongation at Break PSTC-131	Application Temperature Range
Standard	0.94 mil	150% ± 25%	41°F - 113°F (5°C - 45°C)
Metric	24 microns	150% ± 25%	41°F - 113°F (5°C - 45°C)

Test Condition: Temperature: 23°C ± 1°C (73.4°F ± 2°F) | Relative Humidity: 60% ± 5%

### Applications

- Moving & storage
- Carton sealing
- Food Processing
- Bundling

### Storage and Usage

**Suggested Storage Conditions:**

- 15°C - 30°C (59°F - 86°F), or as close as possible to room temperature.
- 60% Max Relative Humidity
- Original packaging in a cool, dry area away from direct sunlight exposure and from freezing.

**Suggested Application Conditions**

- 41°F - 113°F (5°C - 45°C)
- Surfaces to which tape is applied should be clean, dry and free of dust, grease, oil or other contaminants.

Available Product Options

#### Stock Lengths



50m



100m

#### Stock Widths



48mm



72mm

#### Types



Hand



Machine



#### Colors

Clear

Tan

**We customize! Contact a representative for special sizes.**

While we believe them to be reliable, the statements and information herein are only for general guidance and are not warrants or guarantees for accuracy and completeness. The physical and performance characteristics shown are averages obtained from tests recommended by PSTC procedures in our laboratory and the user must by test or otherwise determine suitability for his purpose. There is no warranty of fitness for a particular purpose. Primetac does not take responsibility for the defective material if not stored and used in accordance with the conditions listed above. This specification sheet might change due to the continuous improvement for better quality product.